

# XXXX15d ARMAGEDDON D1

## Speaker Specification

Power	P	<b>5000/20000*</b>	RMS/SPL
DC resistance	Rdc	<b>0,9 + 0,9</b>	Ω
Nominal impedance	ZN	<b>1,0 + 1,0</b>	Ω
Resonance frequency	fs	<b>36</b>	Hz
Voice coil Diameter		<b>3,7</b>	inch
Shipping weight		<b>28</b>	kg

Mechanical Q factor	Qms	<b>7,31</b>
Electrical Q factor	Qes	<b>0,51</b>
Total Q factor	Qts	<b>0,48</b>

Moving mass	Mms	<b>293,9</b>	g
Effective cone area	Sd	<b>754</b>	cm <sup>2</sup>
Mechanical resistance	Rms	<b>0</b>	Kg/s
Compliance	Cms	<b>0,1</b>	mm/N
Force factor	BL	<b>27,59</b>	Tm
Equivalent air volume	Vas	<b>84,8</b>	dm <sup>3</sup>
X max	tot./lin.	<b>80 / 40</b>	mm
Motor weight		<b>20 / 700</b>	kg/oz

SPL 2,83V/1m	<b>96</b>	dB
--------------	-----------	----


Cone: Composite	Spider: Compound
Surround: foam	Coil former: Aluminium
Basket: Aluminium	Dust cap: Paper
Coil: Aluminium flat wire	

\* SPL Burst



Diameter


External diameter	389 mm
Installation diameter	358 mm
Installation depth	305 mm
Magnet diameter	230 mm

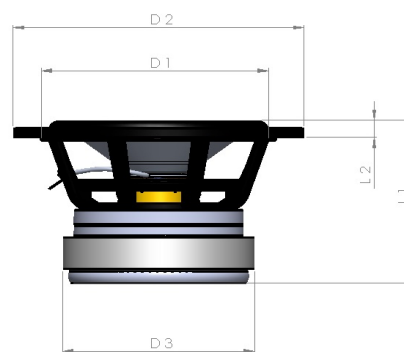

D1 = 389mm  
D2 = 358mm  
D3 = 230mm  
L1 = 277mm  
L2 = 28mm


## Recommended Boxes (including Ports and Drivers)

### Bandpass 6th Order

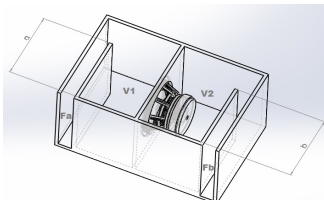


V1 = 100l  
V2 = 110l  
Fa = 250cm<sup>2</sup>  
Fb = 150 cm<sup>2</sup>  
a = 5 cm  
b = 15 cm

### Bandpass 4th Order

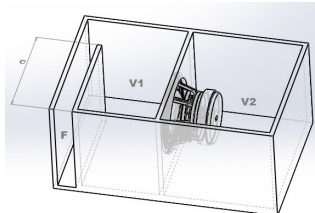


V1 = 100l  
V2 = 70l  
F = 180 cm<sup>2</sup>  
a = 10 cm

### Bandpass 6th Order

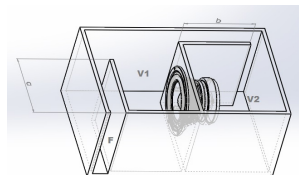


V1 = 100l  
V2 = 100l  
F = 300cm<sup>2</sup>  
Fb = 150cm<sup>2</sup>  
a = 10cm  
b = 15cm

### Vented



V1 = 100l  
F = 300cm<sup>2</sup>  
a = 40 cm

### Sealed



V1 = 70l